


TITE **FOAM**
SEAL™

SELF-ADHESIVE FOAM

THRESHOLD SEALER

- Creates a Gasket Under the Threshold
- Keeps Out Air and Moisture
- Eliminates the Need for Caulk
- Adheres to Wood, Concrete, and Metal

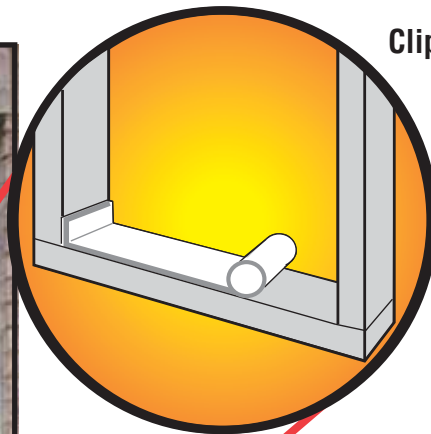

Flat Pack
Clip Strip Display
12 Units/Ctn
2 Clip Strips
6 Units Each
5.5" x 3.5' Ea.
TSFM42F



TSFM42 5.5" X 3.5' roll
TSFM65 5.5" X 6.5' roll
TSFM25 5.5" X 25' roll

COFAIR
PRODUCTS, INC.

7301 N. St. Louis Avenue, Skokie, IL 60076
Phone: 800-333-6700 • www.cofair.com



PREMIUM GRADE SELF-ADHESIVE FOAM THRESHOLD SEALER


INSTRUCTIONS:

1. Be sure door jamb is clean, dry and level before applying foam gasket.
2. Unroll gasket material and center over door jamb.
3. Remove release paper and firmly press gasket material in place.
4. In order to insure a complete seal, extend gasket material a minimum of 1/2 inch up both sides of the door jamb.
5. Set threshold in place, following manufacturer's instructions.
6. Trim off excess gasket material.
7. To fill larger voids, Tite Seal Foam may be placed on top of itself to double thickness. Be sure to remove release paper between layers.

CAUTION: Do not use caulks or sealants containing solvents, VOCs, or mineral spirits below, around or over Tite Seal Foam.



**Flat Pack
Clip Strip Display**
12 Units/Ctn
2 Clip Strips
6 Units Each
5.5" x 3.5' Ea.
TSFM42F

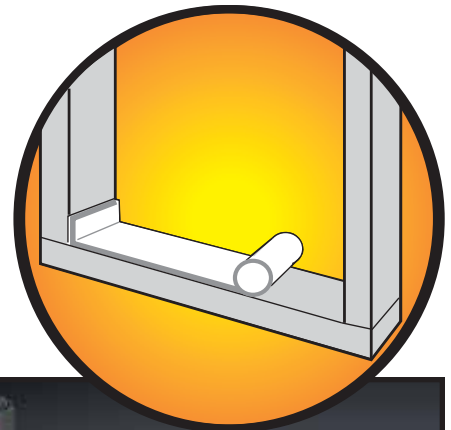

TSFM42 5.5" X 3.5' roll
TSFM65 5.5" X 6.5' roll
TSFM25 5.5" X 25' roll

LIMITED WARRANTY: Cofair Products, Inc. warrants this product to be free of merchantable quality when used and/or applied in accordance with instructions hereon. Cofair Products, Inc. does not warrant this product for any purpose or use other than the general purpose for which it is intended. Liability under this warranty is limited to the replacement of defective product as purchased. THIS LIMITED WARRANTY IS ISSUED IN LIEU OF ALL OTHER EXPRESSED AND IMPLIED WARRANTIES, INCLUDING THE WARRANTY OF FITNESS, AND EXPRESSLY EXCLUDES LIABILITY FOR CONSEQUENTIAL DAMAGES.

